SAFEGUARD MAKING BUILDINGS DRY



Dryzone Mould-Resistant Emulsion Paint


Product Description

Premium quality, low odour mould-resistant coating designed to protect against unsightly and unhygienic black mould even when there is persistent condensation. The unsurpassed performance of **Dryzone Mould-Resistant Emulsion Paint** is achieved by combining modern paint technology with advanced paint-film protection. It is fully washable and resistant to the effects of condensation when the coating is fully dried out. Ideal for walls and ceilings in private and social housing and a wide range of public and commercial buildings.

Benefits

- Lasts for at least 5 years: prevents the recurrence of black
 mould
- Quick drying with no over-painting problems; compatible with all known paint finishes
- Easy to use and cost effective

Properties

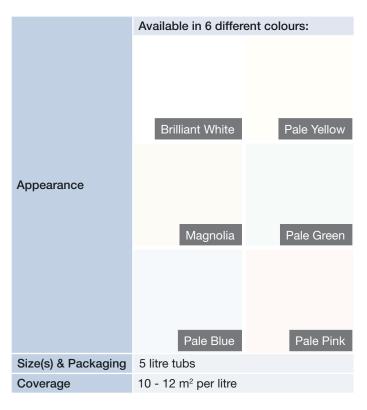



Storage	Store above 5°C in dry conditions. Keep container tightly closed and away from children
Shelf Life	12 months
Thinning	Use clean tap water but do not exceed 10% by volume

Application Information

Preparation

Preparation is straightforward and very similar to normal good decorative practice.

Remove any loose material such as old paint, grease, dirt, mould or defective wallpaper. **SoluGuard Ready for Use Multi-Surface Biocide** can be used for wetting mould-contaminated wallpaper prior to removing it.

- 1. Make good any defects in the surface and rub down to a smooth finish.
- Wash and clean all surfaces (walls, ceilings, window frames and joinery) using SoluGuard Ready for Use Multi-Surface Biocide. If necessary clean badly affected areas a second time.
- 3. Allow to dry thoroughly.
- 4. If necessary, apply an appropriate primer or sealer to new, unprimed or porous plaster and wooden surfaces or bare metal.
- 5. For new or porous plaster surfaces use **Dryzone Mould-Resistant Emulsion Paint** thinned up to 10% with clean tap water as normal good practice. Allow to dry thoroughly.

Technical Datasheet	Last modified 04/16	1 / 2
© 2016 Safeguard Europe Redkiln Close, Horsham, West Sussex, RH13 5QL.	E Ltd., T: +44 (0) 1403 210204 F: +44 (0) 1403 217529 E: info@safeguardeurope.com www.safeguardeurope.com	



DRYZONE

Application

Apply **Dryzone Mould-Resistant Emulsion Paint** using brush or roller.

- 1. Stir thoroughly before use.
- 2. Apply two coats of **Dryzone Mould-Resistant Emulsion Paint** allowing sufficient drying time between coats.
- 3. Clean equipment with clean tap water before the paint dries.
- 4. **Dryzone Mould-Resistant Emulsion Paint** should not be covered with any other paint or wallpaper.

Other Information

Dryzone Mould-Resistant Emulsion Paint will help compliance with Section 82 (Statutory Nuisance), Chapter 43 of the Environmental Protection Act 1990, either used alone or part of various strategies to prevent condensation and mould growth in both private and public tenanted accommodation.

Dryzone Mould-Resistant Emulsion Paint does not have a hazard classification. For more information see the Safety Datasheet (SDS).

Dryzone Mould-Resistant Emulsion Paint is produced in accordance with ISO 9001 and ISO 14001 quality and environmental management systems.

Information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that products, techniques and codes of practice are under constant review and changes occur without notice; please ensure you have the latest updated information.



Technical Datasheet Last modi

Last modified 04/16

© 2016 Safeguard Europe Ltd., Redkiln Close, Horsham, West Sussex, RH13 5QL. T: +44 (0) 1403 210204 F: +44 (0) 1403 217529 E: info@safeguardeurope.com

www.safeguardeurope.com

