


# Oldroyd Xs Slimline Membrane

## Product Description

**Oldroyd Xs Slimline Membrane** is made from polypropylene and is grey in colour. The membrane features an embossed 'X' pattern and has a thickness of 0.5 mm. It is suitable for application to floors, as part of a damp-proofing or waterproofing strategy and it is loose laid.

Accreditations	
	

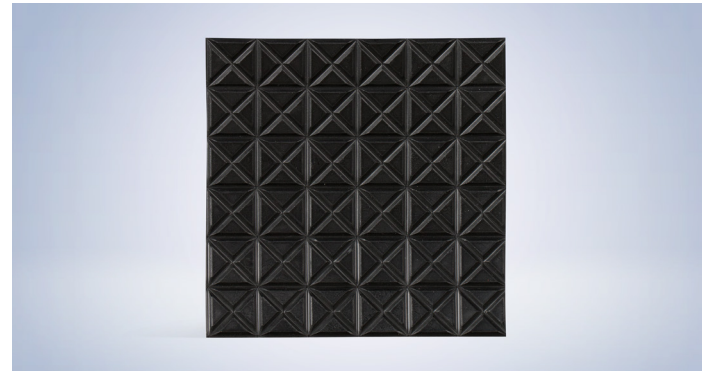

## Benefits

- Resistant to water and water vapour
- Resistant to ground salts
- Increased tensile strength due to unique 'X' pattern feature
- Highly durable
- No maintenance required

## Properties

Appearance	Grey, moulded polypropylene sheet
Size(s) & Packaging	2 × 20 m roll
Coverage	40 m <sup>2</sup>
Service Life	For the life of the structure in which it is incorporated
Storage	Cool, dry conditions

## Application Information

### Preparation

Repair any significant defects in the substrate. If the floor surface to receive the membrane is very uneven it is advisable to level out first.

### Application

Roll the membrane out across the surface of the floor; ensuring a minimum of 100 mm lap up the walls at the edges. All joints to be sealed using the appropriate sealing tape. Please call our technical department for further advice.

## Other Information

**Oldroyd Xs Slimline Membrane** is produced in accordance with ISO 9001 and ISO 14001 quality and environmental management systems.

**Oldroyd Xs Slimline Membrane** is non-hazardous to the environment.

*Information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that products, techniques and codes of practice are under constant review and changes occur without notice; please ensure you have the latest updated information.*